

# HUBER

## TECHNOLOGY

WASTE WATER Solutions

### HIRE UNITS

## HUBER Micro Strainer ROTAMAT® Ro9

### COMBINED SCREEN

Inlet screen for flows up to 130 l/s. The screen incorporates screenings washing, conveying and dewatering. Available with 3mm or 6mm perforated mesh.

Robust stainless steel construction and fully frost protected.

### SPECIFICATION

### Ro9 COMBINED SCREENED

Flow capacity

Up to 130 l/s

Screening capacity channel width

300 - 500mm

Electrical supply

20 AMP, 400V, 3ph+N+E 50hz

Washwater connection

1 1/4 BSP (supply pressure: 4-7 bar max.)


Washwater consumption

2 l/s @ 4-7 bar

Dry weight

Up to 390kg

**HIRE COSTS - PLEASE CONTACT US FOR HIRE COSTS**

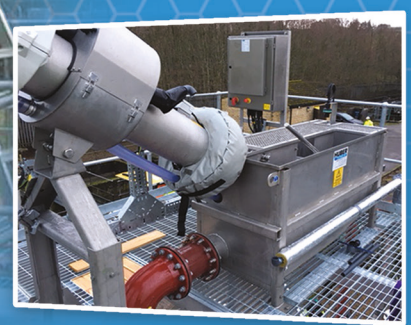

For any more information or enquiries please do not hesitate to contact our Hire Department on:

01709 835532 | 07802 459307 | [kevin.benson@huber.co.uk](mailto:kevin.benson@huber.co.uk) | [www.huber.co.uk](http://www.huber.co.uk)